## (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 10 February 2005 (10.02.2005)

PCT

## (10) International Publication Number WO 2005/012610 A1

(51) International Patent Classification7: 47/24, 49/42, 49/50

D03D 47/28.

(21) International Application Number:

PCT/NL2004/000477

(22) International Filing Date;

2 July 2004 (02.07.2004)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data: 1023943

17 July 2003 (17.07.2003) NL

(71) Applicant (for all designated States except US): TE STRAKE TEXTILE B.V. [NL/NL]; Dr. Doomeweg 26, NL-5753 PM Deame (NL).


(72) Inventors; and

- (75) Inventors/Applicants (for US only): GORRIS, Joannes, Josephus, Henricus, Marie [NL/NL]; St. Bligiuspad 3. NL-5645 EG Eindhoven (NL). HIEMSTRA, Hendrik [NL/NL]; Wolfsklauw 14, NL-5734 NL Doume (NL). PUISSANT, Patrick [BE/BE]; Bochtenstraat 35a, B-9270 Laame (BE).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT. AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN. CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EB, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD. MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PQ. PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BB, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SB, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW. ML. MR, NE, SN, TD, TG).

## Published:

with international search report

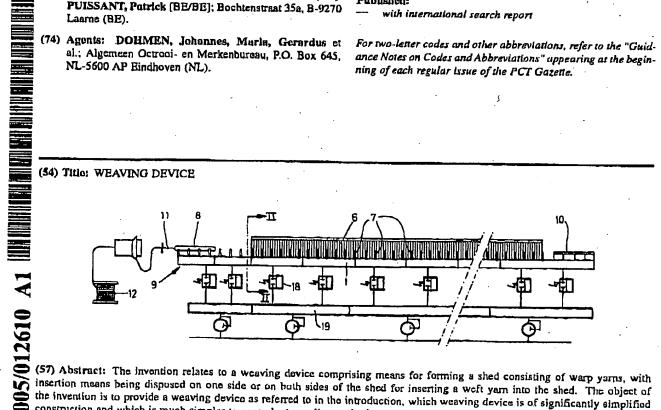

insertion means being dispused on one side or on both sides of the shed for inserting a west yarn into the shed. The object of the invention is to provide a weaving device as referred to in the introduction, which weaving device is of significantly simplified construction and which is much simpler to control. According to the invention, the weaving device is to that end characterized in that the west yarn has been formed into a packed clew, which packed clew unwinds into an elongated west yarn upon insertion into the shed. These aspects obvinte the need to use a projectile having a high inert mass and the related insertion means and braking means for moving and decolerating the movement of the projectile through the shed, resulting in a weaving device of significantly simplified construction, which is much simpler to control and which can be operated at a much higher rate.